




# CLASSIC 20W-50 (UK)

## Premium Mineral Engine Oil

Issue: February 2017

PRODUCT CODE	PACK SIZE	CTN / QTY
CLAS20W50001	1 Litre	6
CLAS20W50005	5 Litre	4
CLAS20W50205	205 Litre	

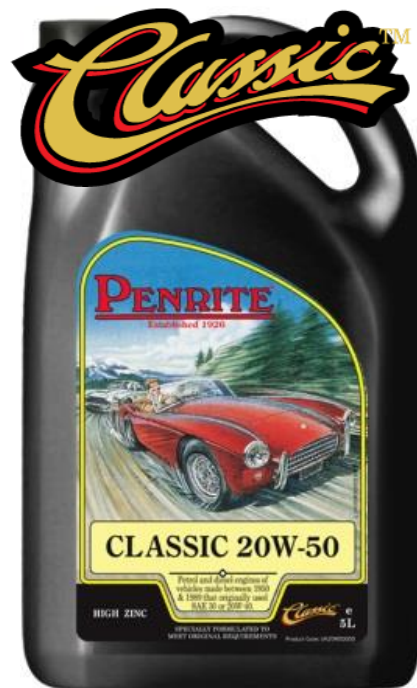

# PENRITE

### Description

**Classic 20W-50** is a premium mineral, multigrade engine oil designed specifically for classic light duty petrol and diesel fuelled vehicles manufactured between the 1970s to the mid-1990s.

### Applications

**Classic 20W-50** is suitable for passenger cars, motorcycles, 4WD's, light & heavy duty commercial vehicles that originally specified SAE 30, SAE 20W-40 or SAE 20W-50 engine oils and operate in cooler ambient temperatures. This oil is suitable for use for both winter and summer conditions.

**Classic 20W-50** contains a special additive pack that suits vehicles of the era and exceeds the manufacturer specification requirements required during this period, hence offering a greater level of engine protection compared to original oils.

**Classic 20W-50** meets API SL/CF engine oil specifications and contains optimised **ZINC** levels for added anti-wear protection for older engines.

**Classic 20W-50** also meets the JASO MA specification, making it suitable for use in motorcycles fitted with wet clutches.

### Product Benefits

- Contains a balanced formulation of modern additives to suit vehicles of this period, exceeding the originally required oil specifications
- Maintains engine cleanliness and includes optimised zinc levels for wear protection
- Shear stable formulation
- Suitable for use as a winter and summer engine oil

### Industry Specifications

API SL/CF      JASO MA

### Typical Data

Density at 15°C, kg/L	0.880
Flash Point, °C	220
Viscosity, Kinematic, cSt	
at 40°C	152
at 100°C	17.5
Viscosity Index	125
Viscosity, Cold Cranking @ -15°C	5800
Magnesium, mass %	0.136
Zinc, mass %	0.108
Phosphorus, mass %	0.098



Information in this sheet is based on recent production. Minor variations to typical properties are expected in normal manufacture and do not affect product performance. An MSDS is available on request.

**PENRITE OIL COMPANY PTY LTD**, 88 Lewis Road, Wantirna South  
Victoria AUSTRALIA 3152, ABN 25 005 001 525  
Enquiries: Phone 1300-PENRITE (1300 736 748)  
Fax: 1800-PENRITE (1800 736 748)  
International: Phone: 61 3 9801 0877, Fax: 61 3 9801 0977  
New Zealand Ph: 0800 533 698, Fax: 0508 736 748

**PROUDLY AUSTRALIAN  
FAMILY OWNED  
SINCE 1926**



United Kingdom and EU Ph: +44 (0) 1594 562357, Fax: +44 (0) 1594 564234  
Website: [www.penriteoil.com](http://www.penriteoil.com), Email: [penrite@penriteoil.com](mailto:penrite@penriteoil.com)